

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 22 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 1-28-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 3-8-1996
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14022208
N: 486 927.434 8(m)
E: 45 822.584 0(m)

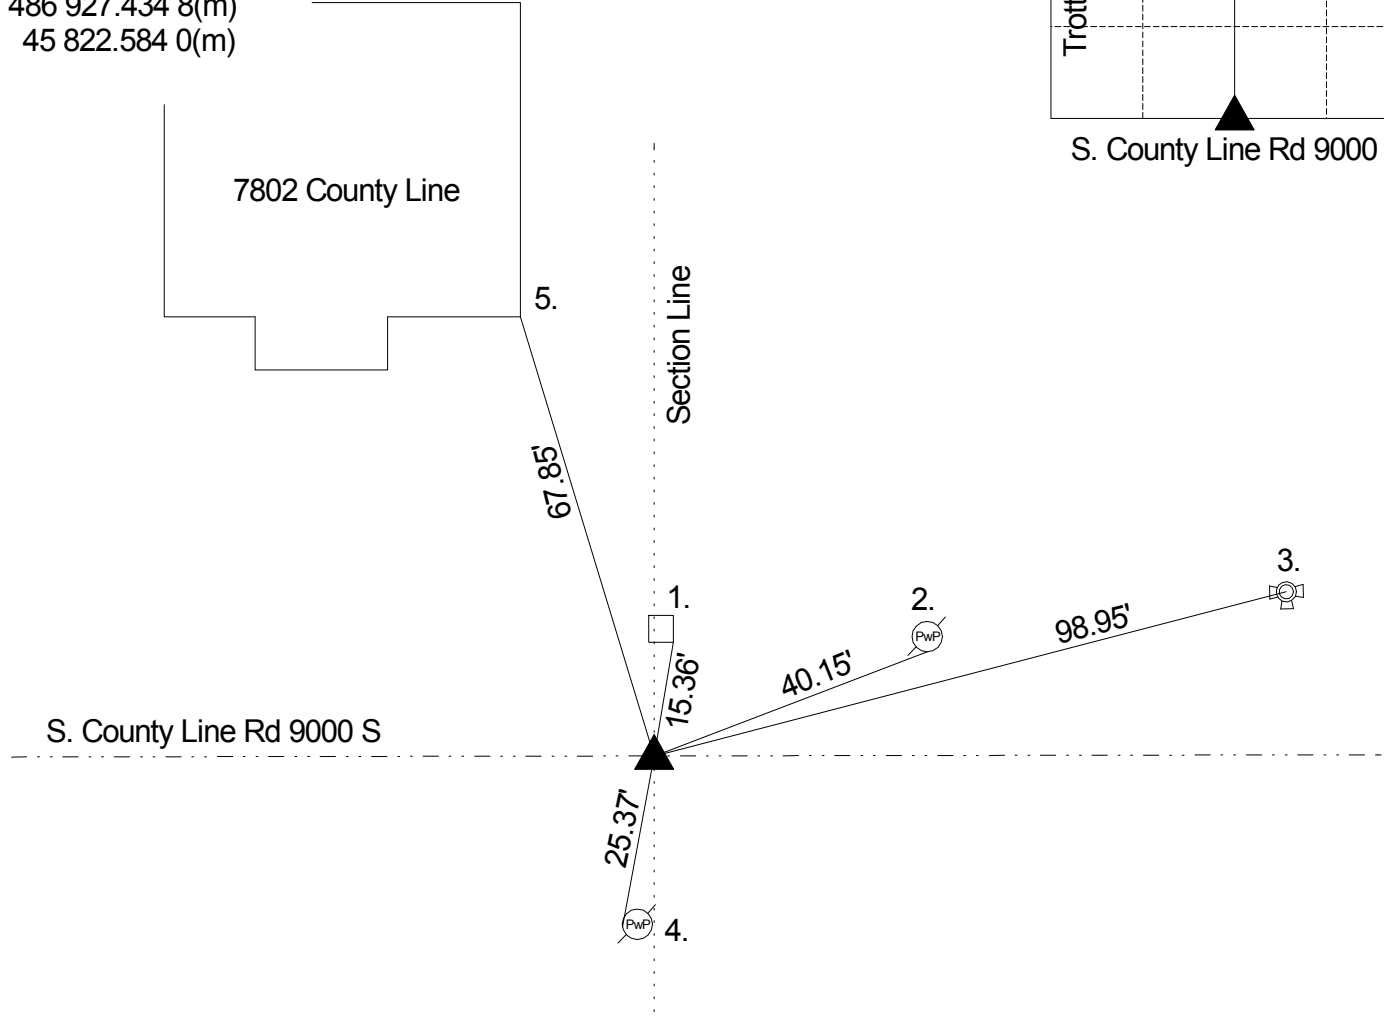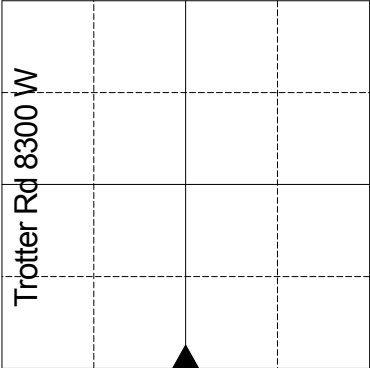

Wm. B Laughlin set a post in 1820 with witnesses: beech 12” dia. N 57 W 30 links, beech 4” dia. S 25 E 2 links, as per the Marion County Atlas pg 1. No mention of this corner is made in the Decatur Twp. Legal Survey Book. 11-28-1949 Gioscio found a stone in place of the corner. 8-23-67 Bookedis made no mention of the corner when he tied it in. 12-2-74 Howe called a PK nail. 7-5-85 Greene called a PK nail. 7-20-90 Kiste called a road nail. 6-5-91 Greene excavated the corner and found a road nail @ surface, 2”iron pipe down 6”, RR spike down 6”, next to the stone down 12”, an old hub next to stone down 12”, and set a Harrison monument. 3-8-96 Wilcoxen called a Harrison. 12-31-2000 Kiste called same. 1-28-05 Wilcoxen called same. 1-28-10 Wilcoxen called same.

REF.	DISTANCE	DESCRIPTION
1.	15.36'	SE corner 10" x 10" concrete post
2.	40.15'	PK nail S PwP #1-801Z 24" up
3.	98.95'	Top nut fire hydrant
4.	25.37'	Mag nail w/brass washer W PwP #186-801 Z 12" up
5.	67.85'	Corner of foundation 7802 County Line